




# 50KB

## Acoustic Amplifier

applicable to serial numbers 001xxxx

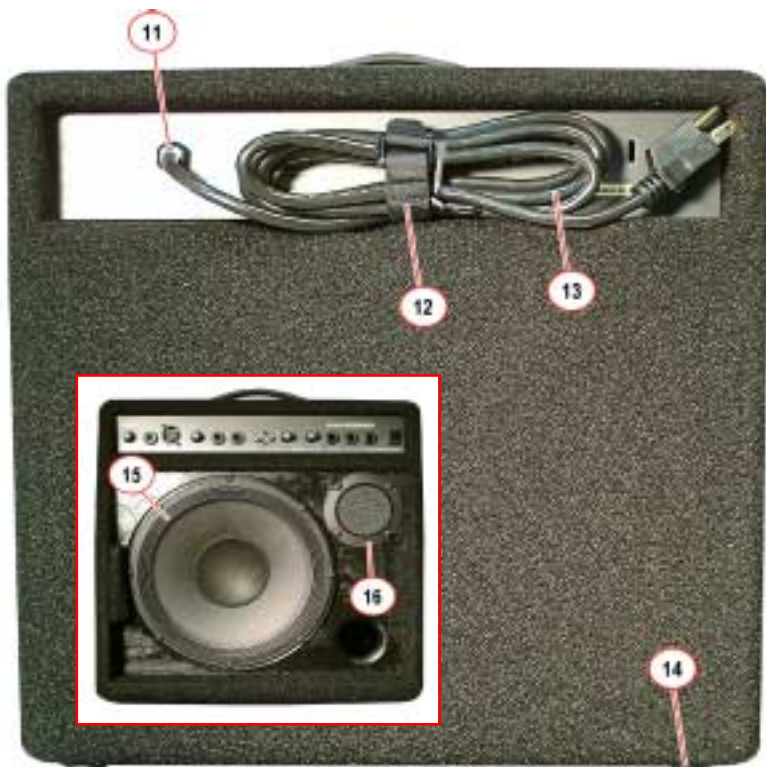

# Part# Description Function

Labeled Components			
1	4418	_10K 5C R/A 9MM HORIZONTAL P28	Gain 1
2	3450	1/4" JCK PCB MT HORZ GOLD	Jack
3	3660	XLR FEML PCB MT HORZ	Jack
4	4417	_10K 5B LIN 9MM HORIZONTAL P28	Gain 2
5	8459	9.5" STRAP HANDLE, PLASTIC COVERS	Strap
6	3460	RCA DUAL PCB MT VERT GOLD .475"	Jack
7	4420	_50K B LIN 9MM HORIZONTAL P28	Treble
8	4420	_50K B LIN 9MM HORIZONTAL P28	Bass
knob	8641	<i>Note: All pots use 8641 Aqua Knob</i>	
9	3698	SPST ROKR SW QUIK 180" AC PWR BL/BL	
10	Z350	50KB Grille (special order while unit is in production only)	
11	3834	HEYCO #1214 STRAIN RELIEF	
12	8468	VELCRO STRAP 3/4"X22CM (VELSTRAP)	
13	3481	8' 3/18 SJT AC LINE CORD 250 CLIPS	
14	8547	PLASTIC FOOT BLACK	
15	7322	10" 4R 50WPGM SPEAKER	
16	7415	4R 30W TWEETER RADIAL MOTOROLA	

Internal Electronic Components			
	1309	BLOC-40B/40K/40W/50B	XFMR
	6827	1N5402 200V 3A0	DIODE
	6755	LM3876T	IC 40 WATT POWER AMP
	6840	MC33078P	IC DUAL OP AMP
	6882	TL072CP	IC FET DUAL OP AMP
	5887	2200U 50V 20%CAP BLK 18X27MM	EL
	2468	0.800 AMP SLO-BLO .25X1.25	FUSE
	3830	TO218 PREGREASED MICA 56-78-2AP	
	6798	MC4741CP	IC QUAD OP AMP
	6827	1N5402 200V 3A0	DIODE
	6840	MC33078P	IC DUAL OP AMP
	6882	TL072CP	IC FET DUAL OP AMP
	6889	TLO74CN	IC QUAD O/A T.I. ONLY
	8581	CUSTOM PBL TRANSISTOR SPACER	

Notes: